



# SIGHT FLOW INDICATORS

**D**  
**8**


**G.M. Gun Metal**  
**S.S. Stainless Steel**  
**M.B. Manganese Bronze**

**C.I. Cast Iron**  
**C.S. Cast Steel**

## INDEX OF ILLUSTRATED VALVES & EQUIVALENTS IN VARIOUS MATERIALS

SIGHT FLOW INDICATOR	End Connections	Body & Cover	Double Window	Single Window	Flap Indicator	Ball Indicator	Wier Type	Glass	Horizontal Flow	Vertical Flow Upwards	Rating		
											Working pressure	Max Temp	Working pressure at max temp.
											kPa psi	°C °F	kPa psi
9771A CAST STEEL	ANSI 150	CS	✓		✓			Armour Plate	✓	✓	See Table	260 500	See Table
9772 GUN METAL	Table H	GM	✓		✓			Armour Plate	✓	✓	See Table	250 482	See Table
9773A CAST STEEL	ANSI 300	CS	✓		✓			Armour Plate	✓	✓	See Table	260 500	See Table

SIZE (MM)	15	20	25	32	40	50	65	80	100	150	200	250	300
DIMENSIONS (MM)													
A	159	159	178	172	172	229	238	-	305	318	398	-	-
B	98	98	124	133	177	187	159	-	232	297	374	-	-
Window Ø	51	51	64	64	64	70	70	-	120	120	178	-	-
Max Pressure	1515 kPa							1240 kPa					

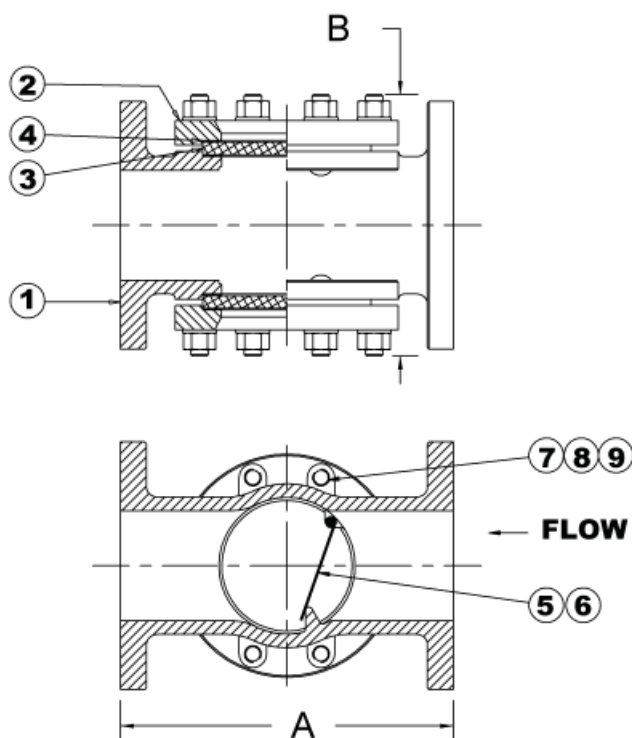

Sight flow indicator, double window, bolted construction with indicator flap and flanged ends.

### PARTS LIST.

1. Body
2. Cover
3. Window
4. Gasket
5. Flap
6. Pin
7. Stud
8. Nut
9. Washer

Mack Valves Head Office  
30 Burgess Road  
BAYSWATER, VIC 3153  
Tel: (03) 9737 5200  
Fax: (03) 9720 1344  
Email: enquiries@mackvalves.com.au

Mack Valves NSW Office  
Unit 9/9-11 Abel Street  
Penrith NSW 2750  
Tel: (02) 4722 6033  
Fax: (02) 4722 6144  
Email: enquiries.nsw@mackvalves.com.au

Mack Valves SA Office  
204 Prospect Road  
Prospect SA 5082  
Tel: (08) 8269 6477  
Fax: (08) 8344 5934  
Email: enquiries.sa@mackvalves.com.au